



INNOVATIVE POWER SOLUTIONS

CABLE ASSEMBLIES

POWER DISTRIBUTION

CONTROLS

WWW.POWERASSEMBLIES.COM

• LAS VEGAS, NV • BEND, OR • POMPANO BEACH, FL •

TYPE DLO EXTENSIONS

PRODUCT SPECIFICATIONS

OVERVIEW

Power Assemblies pigtails made from DLO cable are for use with DLO, stage cable or Type W assemblies. Lengths are standard in 10', 25', 50' and 100' for extensions. Custom lengths are also available.

Note: Usable with Power Assemblies' Generator Docking Stations and Company Switches



FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



CABLE SPECIFICATIONS

TYPE DLO

TECHNICAL DATA

Temperature Rating: 90 °C

Voltage: 2000V

AWG: #8-250

Conductors: 1


APPLICATIONS

Portable Power Systems

Entertainment Industry

Communication & Audio

Temporary Power

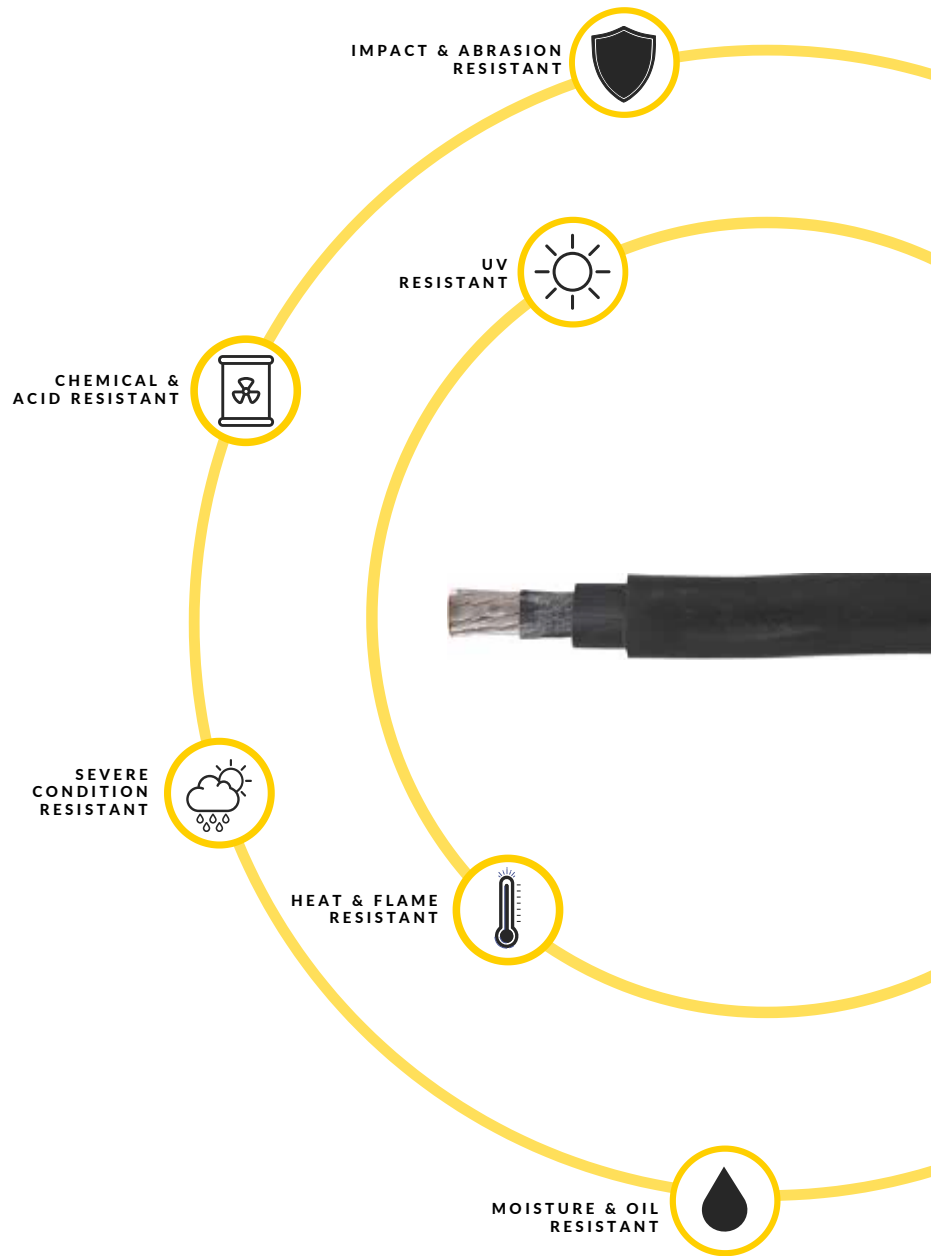

FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



COMPONENT SPECIFICATIONS

SERIES 16 CAMLOCK





TECHNICAL DATA

Series: 16
AWG: 2/0 - 4/0
Amperage Rating: 400A
Voltage Rating: 600V
Max Temperature Rating: 105°C
Double Set Screw

MATERIAL

Insulating Sleeve: Plastic
Contacts: Gold Plated
Locking Rings: Rubber Coated

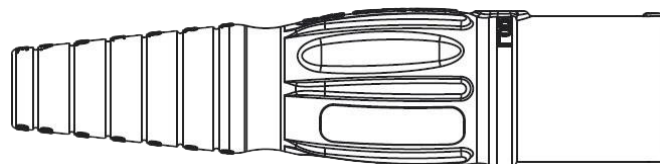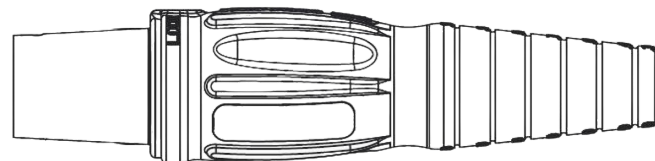

FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



COMPONENT SPECIFICATIONS

SERIES 15 CAMLOCK



CONTROLLED
REMOVAL



UV
RESISTANT



ERGONOMIC
GRIP



ALIGNMENT
INDICATORS



OVER-TORQUE
RESISTANT



QUICK-CONNECT
DESIGN



TECHNICAL DATA

Series: 15
AWG: #8-#2
Amperage Rating: 150A
Voltage Rating: 600V
Max Temperature Rating: 105°C
Double Set Screw

MATERIAL

Insulating Sleeve: Plastic
Contacts: Gold Plated
Locking Rings: Rubber Coated



FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM

