



INNOVATIVE POWER SOLUTIONS

CABLE ASSEMBLIES

POWER DISTRIBUTION

CONTROLS

WWW.POWERASSEMBLIES.COM

• LAS VEGAS, NV • BEND, OR • POMPANO BEACH, FL •

TYPE SC PIGTAILS

PRODUCT SPECIFICATIONS

OVERVIEW

Cable end opposite of a CAM can be blunt, tinned, or with a standard 1/2" hole, long barrel lug. Optional custom labeling or cable print is available. A black adhesive shrink tube is added to the lugged connections for water resistance and a superior fit and finish.



FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



CABLE SPECIFICATIONS

TYPE SC

TECHNICAL DATA

Temperature Rating: 105 °C

Voltage: 600V

AWG: #8 - 4/0

Conductors: 1

APPLICATIONS

Portable Power Systems

Entertainment Industry

Communication & Audio

Temporary Power



CHEMICAL & ACID RESISTANT



SEVERE CONDITION RESISTANT



UV RESISTANT



DIRECT BURY & TRAY CABLE RATED



HEAT & FLAME RESISTANT



INDENT PRINTED



MOISTURE & OIL RESISTANT



FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



COMPONENT SPECIFICATIONS

SERIES 16 CAMLOCK





TECHNICAL DATA

Series: 16
AWG: 2/0 - 4/0
Amperage Rating: 400A
Voltage Rating: 600V
Max Temperature Rating: 105°C
Double Set Screw

MATERIAL

Insulating Sleeve: Plastic
Contacts: Gold Plated
Locking Rings: Rubber Coated

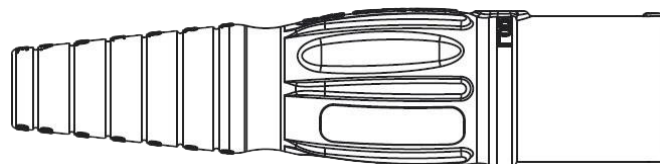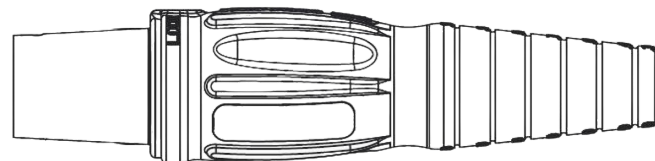

FLORIDA
(866)825-8525
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM



LAS VEGAS
(877)597-5787
SALES@POWERASSEMBLIES.COM
POWERASSEMBLIES.COM

